

## RESOLUTION AND FPS

Min FPS: 35			Approx. Record Time (Seconds)	
Width*	Height	Max FPS	16 GB RAM	32 GB RAM
2560	1600	1,013	4.1	8.3
2560	1440	1,126	4.1	8.3
2560	1080	1,500	4.1	8.3
2560	720	2,245	4.1	8.3
2560	480	3,359	4.1	8.3
2560	240	6,664	4.2	8.4
2560	128	12,318	4.2	8.4
2560	64	23,912	4.3	8.6
2560	32	45,167	4.5	9.0
2560	16	81,300	4.8	9.7
1920	1080	1,500	5.5	11.0
1280	720	2,245	8.3	16.6



## SAMPLE APPLICATIONS



Aerospace



Automotive Testing



Surface Mining



Food Processing




Beverage Packaging







Biology Study



- 1: Gigabit Ethernet
- 2: Power On LED
- 3: 12 VDC In
- 4: Ready Out
- 5: IRIG B
- 6: Sync In
- 7: Sync Out
- 8: Trigger
- 9: On/Off
- 10: Standard "C" Mount
- 11: Armed LED
- 12: Ready LED
- 13: Record LED

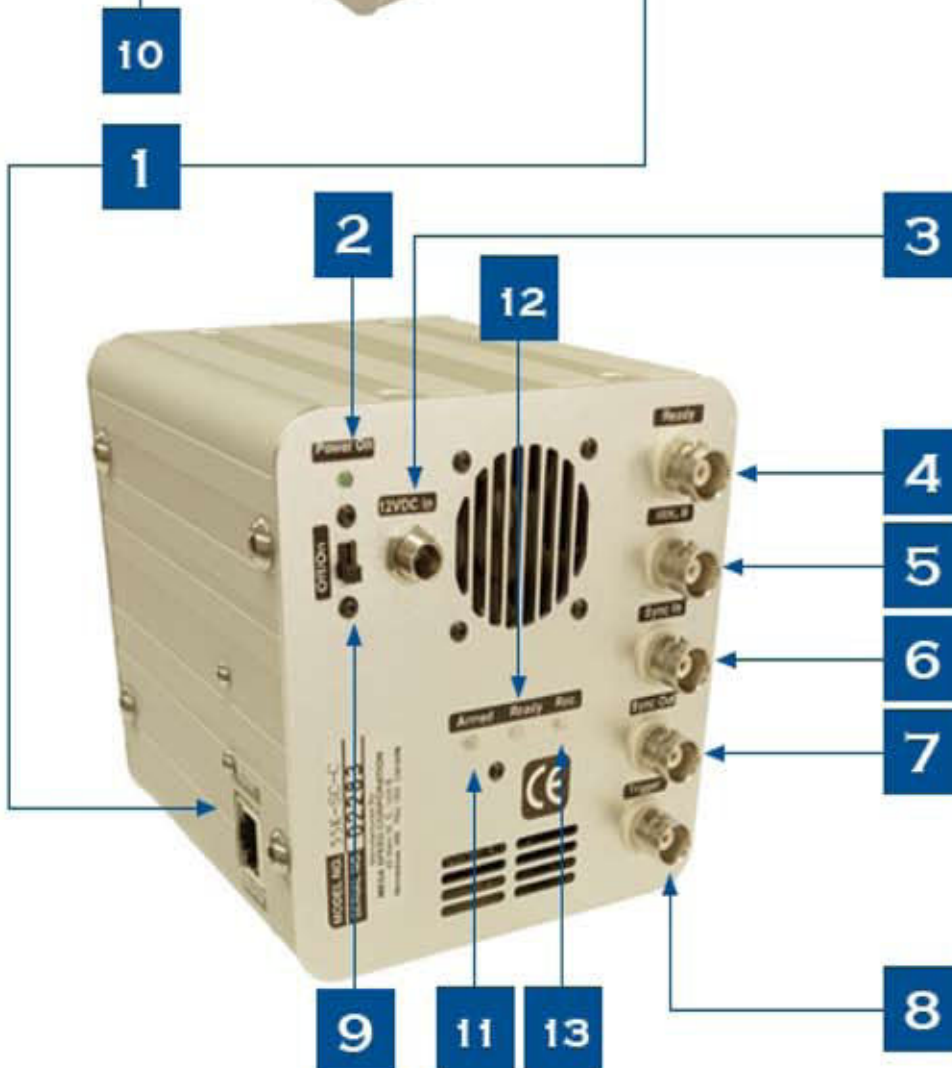

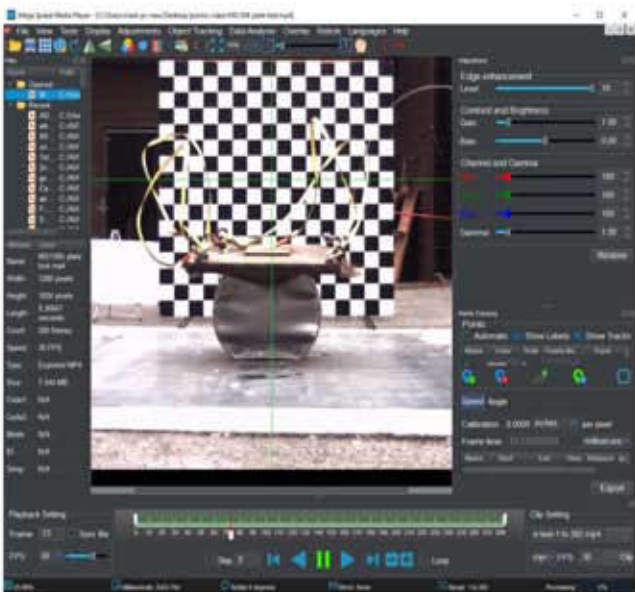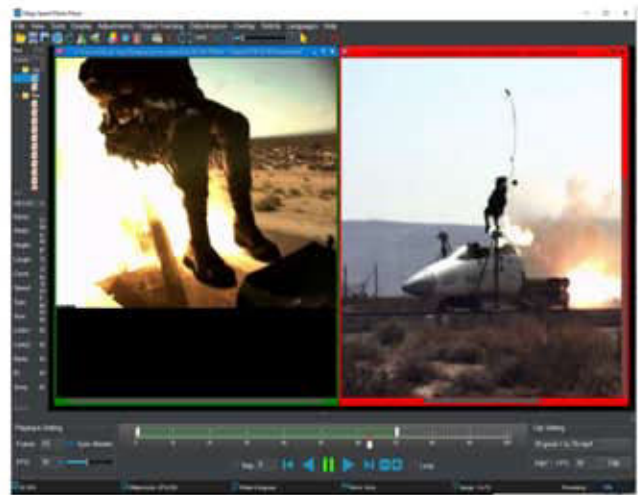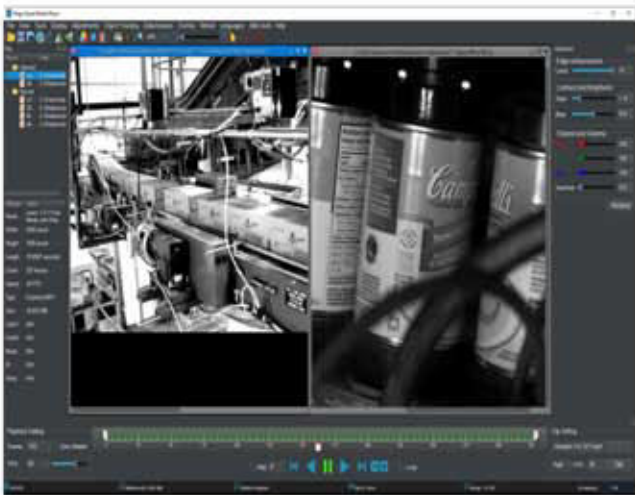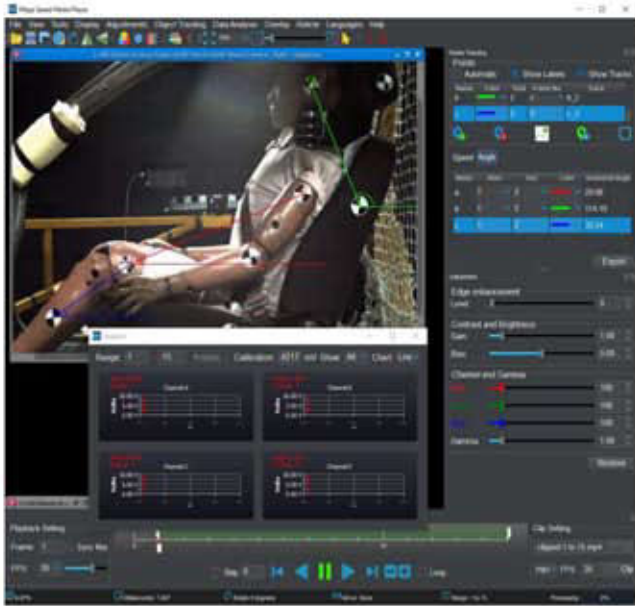

**Making Sense Of Your High Speed Image Data. The Included Mega Speed Media Player!**

**New Tools To Measure, Synchronize, Batch Process, Clip And Compress. The Fastest Video Analysing Work-Flow Available. Helping You Make Sense Of All Your High Speed Image Data. \$1995.00 Value free with every Mega Speed Camera.**



## MS95K-SC SPECIFICATIONS

Sensor Type	Color or monochrome CMOS sensor
Image Sizes	User defined in software
Maximum Resolution	2500 x 1600. 1" optical format
Minimum Resolution	64 x 2
Maximum Speed	1000 fps at maximum resolution. Higher speed settings at reduced image resolutions
Pixel Size	7 micron x 7 micron square pixel
Shutter Speed	Global shutter 2 us to 30 ms in 1 us steps
Spectral Response	400nm to 1000nm
ISO	5000 with boost on ( Monochrome)
A-D Converter	8 bit
Trigger In Requirement	3 to 24 VDC, active high through BNC jack. Center pin positive or simple switch closure
Sync Out	TTL 3.3 VDC via BNC jack. Center pin positive active high on exposure
Trigger Modes	Software, manual, pre/post, segmented, synchronized, single sequence or snap shot
IRIG B	IRIG B frame embedded time stamp via BNC jack. Accuracy greater than 50 microsecond
Editing Software	Image analysis, data acquisition, object tracking, AVI editing & image compression
File Saving	User can save in RAW, AVI, JPEG, BMP, TIF, PNG or MP4 format to PC hard drive
Control Software	Mega Speed Camera Control software
Video Pre-view	Live 30 fps preview to host PC during set up and capture via Gigabit Ethernet
Camera Memory	16 GB DDR standard RAM or optional 32 GB DDR RAM
Data Download	Real time digital image review and analysis while downloading from camera memory to control PC
Playback Rate	User selectable in PC software from 1 to 500 fps for fast video review
PC Requirements	RJ 45 Gig E connection, Window 10, 64 bit, 2GHz, 16 GB RAM, 500 Gig HD
Networking	All switches and hubs must be Gigabit Ethernet capable
Camera Cable	Requires Cat 6 Ethernet cable for PC connection and control
Lens Mount	Standard "C" mount. "F" and "G" mounts available
Camera Size	4.5" x 4" x 4"
Camera Weight	900g
Camera Body	Machined anodized aluminum
Power Requirements	120 or 240 VAC for camera power supply or 1.7 amps @ 11 - 13 VDC for direct connection
Shock Rating	100g for 10 milli-seconds 10 times all ( 6 ) axis. Operational vibration meets 0.25g, from 5-500Hz
Temperature	Operating temperature is -40° C to 40°C